



VALPRO COMMERCIAL REFRIGERATION

203 Kelsey Ln., Building G

Tampa, FL 33619

813-502-0300

Toll Free 1-888-VALPRO-8

www.ValproRefrigeration.com

sales@ValproRefrigeration.com

PROJECT:

MODEL #:

ITEM #:

QTY:

AVAILABLE W/H:

APPROVAL:

UNDERCOUNTER REFRIGERATOR 27" MODEL: VPUCR27

We are proud to introduce the beautifully constructed **Valpro VPUCR27**. Our single door unit offers large usable interior volume, durable stainless steel construction and superior energy efficiency. This model will provide many years of worry free service and delivers cost saving Energy Star efficiency. This unit utilizes an over-sized balanced refrigeration system allowing faster temperature recovery and shorter run times in a busy commercial environment. This unit uses natural hydrocarbon refrigerant as an environmentally responsible choice having low global warming potential and no potential for ozone depletion. All Valpro products are manufactured under strict ISO9001 standards for quality assurance, and to consistently deliver to our customers products that satisfy all expectations. All our products are operated, extensively monitored, and undergo rigorous inspection prior to packaging and shipping.

KEY FEATURES

- Durable stainless steel exterior, (top, front, sides and frame)
- Interior 304 stainless steel floor and white interior ABS liner
- Heavy duty worktop surface
- Energy Star rated efficiency and ETL sanitary certified to NSF Standard 7
- Self-contained over sized balanced refrigeration system uses environmentally friendly R600A hydrocarbon refrigerant with low GWP and zero ozone depletion
- Larger efficient ECM fan motors with larger fan blades for superior air flow providing faster recovery times
- High density 2.4" foamed in-place CFC and HCFC free polyurethane insulation
- Door integrated heating element eliminates any condensation
- Self closing doors with remain open feature past 90° for easy access loading and unloading
- Snap-in magnetic door gaskets removable and replaceable without tools for ease of cleaning
- One heavy duty, epoxy coated wire shelf supported by stainless steel pilasters for easy adjustability
- Electronic thermostat digitally controlled temperature system maintains optimum temperature with easily viewed LED display
- Four casters, front locking, make it easy to maneuver and clean underneath



Intertek



Intertek



* Compressor warranty 2 year parts & labor / 3 additional year warranty compressor part only

Technical Data

Dimensional Data

Exterior Dimensions	27.8"W x 29.9"D x 35.5"H
Interior Dimensions	23"W x 24.9"D x 24.2"H
Net Storage Capacity	6.5 cu. ft.
Net Weight	181 lbs.
Crated Weight	198 lbs.
Shipping Dimensions	29.3"W x 31.5"D x 38.2"H

Refrigeration Data

Temperature Range	33°F - 41°F
Refrigerant	R600A
Refrigerating System	Capillary Tube
Temperature Controller	Digital
Horsepower	3/8


Construction Data

Exterior Material	430 Series Stainless Steel
Interior Floor Material	304 Series Stainless Steel
Interior Wall Material	White ABS Liner
Insulation	2.4" CFC Free Polyurethane
Shelves	1 Heavy Duty Epoxy Coated


Electrical Data

Amps	1.5
Voltage/Frequency/Phase	115V/60Hz/1
Plug Type	NEMA 5-15P
Electrical Cord Length	8 ft.


FRONT VIEW

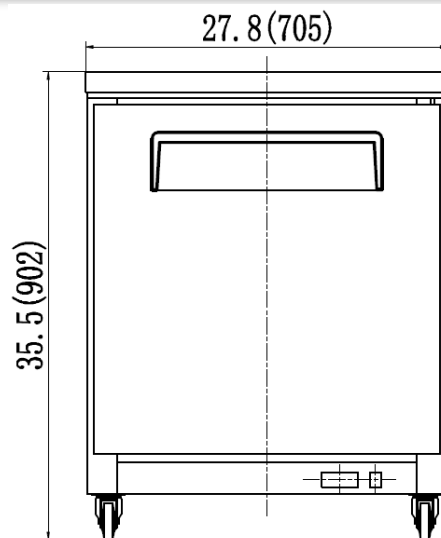

PLAN VIEW

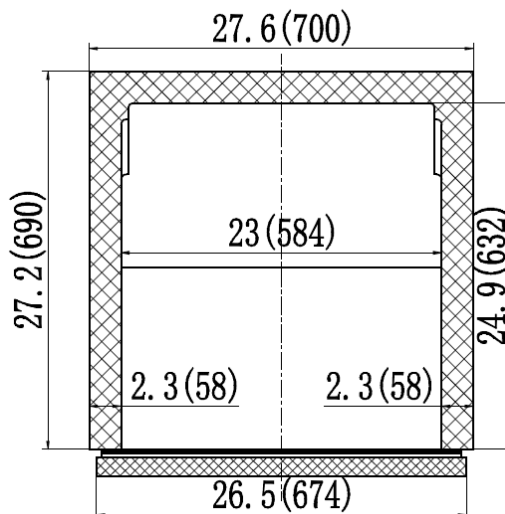

SIDE VIEW

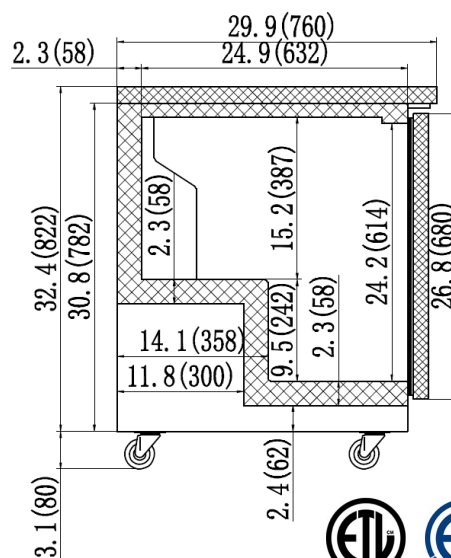

Intertek



Intertek



ENERGY STAR